IMPACT LIGHTING INC.

Galaxy Bar™

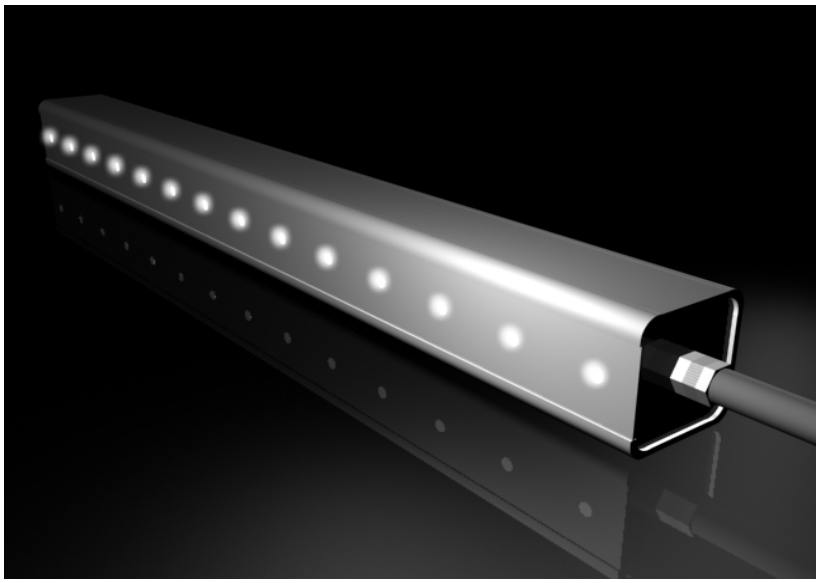

SPECIFICATIONS FEATURES

Construction:
Extruded Plastic Body and Face Plate
CK-30, .75 PMMA fiber.

Anodized finishes optional

Average Lumen Output Per Foot

96
(1/2" Fiber Spacing / Based on 6' Fiber Tail)

192
(1/4" Fiber Spacing / Based on 6' Fiber Tail)

Warranty:
2 year limited

DESCRIPTION

Applications: Display case lighting, architectural lighting, edge lit glass, retail lighting, cove lighting, signage and general illumination.

- Virtually maintenance free
- Very bright appearance.
- Excellent light transmission into glass.
- Easy installation and orientation

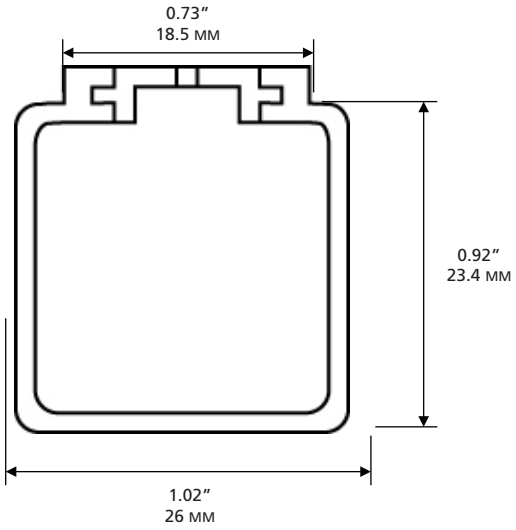

ORDERING INFORMATION

MODEL	OPTIONS		FIBER SPACING		BAR LENGTH	TAIL LENGTH	ACCESSORIES
IL-BFX	I	INTERIOR	.25	1/4"	_____ Ft.	_____ Ft.	Plastic Mounting Clip
	E	EXTERIOR	.50	1/2"			Aluminium End Cap

ALS-LT — ☐ — ☐ — ☐ — ☐

Ordering Example: **ALS-LT - I - .25 - 24 - 6**