

PRODUCTS: THE LED MINI

APPLICATIONS

General Lighting, Indirect Accent Decor Lighting, Cabinet Lighting, Stair Lighting, Floor Lighting, Commercial Lighting Applications, Restaurant Lighting and Home Theater Lighting.


SPECIFICATIONS

Power: 12 Watts
 Color: RGB, Cool (5000~6500) and Warm White (2700~3500)
 Working Voltage: DC12V
 Size: 2" x 1.25"
 Material: Aluminum Alloy
 Projection Distance: >5meter

Input Current: 350mA
 Input Voltage: 12V DC
 Power Consumption: 1.9W @12.2V, 0.8 AMPS
 Dimming: Dimmable
 depends on power supply
 Weight: 0.07lbs (0.03kg)
 Beam Angle: 45° beam



MINI/45°
 3000K, 66 lm

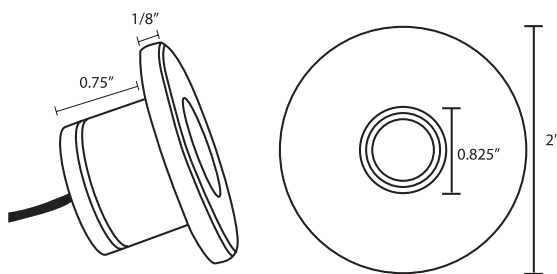

Distance	FC	Lux	Beam Diameter	
0.5'	0.15m	2320	1.2'	0.37m
1.0'	0.30m	62.0	2.5'	0.76m
1.5'	0.46m	28.0	3.7'	1.13m
2.0'	0.61m	14.0	5.0'	1.52m
2.5'	0.76m	7.0	6.2'	1.89m
3.0'	0.91m	4.0	7.4'	2.26m

180°
 90°
 45°
 26.46 cd max.
 VA 0°

I max /2 → 102° (2 x 51)

Note: A high CRI of 92 has about 25% less lumen output while a standard CRI of 75~82 has optimal lumen output.

ACCESSORIES:

IL-LM-FP

FACE PLATE

ORDERING INFORMATION

MANUFACTURING CODE	PRODUCT CODE	COLOR	FINISH	LENS	LIGHT TAIL	FACE
IL	LM	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
IMPACT LIGHTING		1. 3000 2. 5000 3. RGB	1. ALUMINUM 2. BRASS 3. STAINLESS STEEL 4. CUSTOM	1. 45°	1. 1' 2. 10' 3. 25'	1. W/ SCREWABLE HOLES 2. SMOOTH FACE

Note: Also available in different beam angles.