


# PRODUCTS: LED INDOOR THEATER LIGHTING



# LED INDOOR THEATER LIGHTING

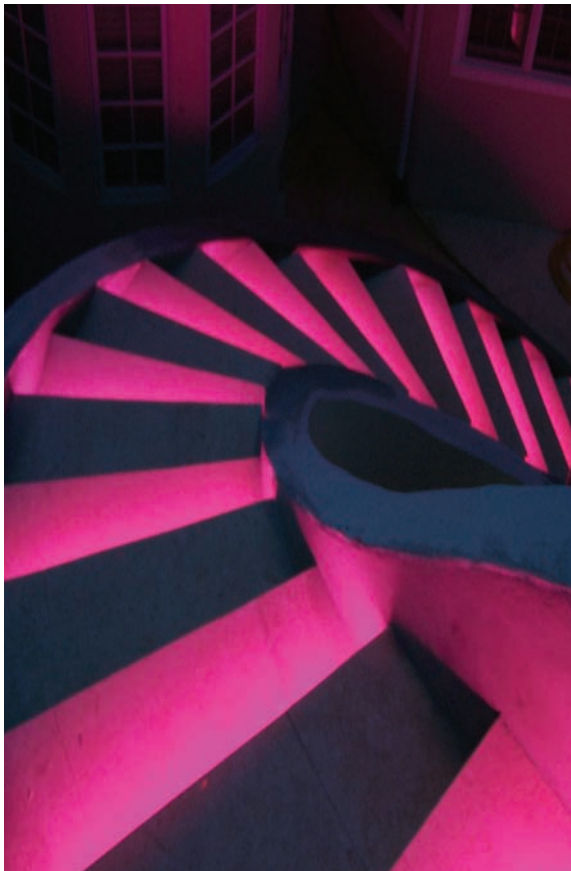

LED step lighting is becoming increasingly popular for all sorts of paving schemes, from simple point illumination for residential paths and patios to spectacular commercial schemes that are used to light up walkways, landscape features or just to provide ambient light for pedestrians and traffic after dark.

Step Lighting is used to provide a number of benefits including:


- Safety:

Illuminating pathways, indicating hazards, such as steps, or marking safest routes.

- Amenity:

Providing light to enable social interactions to continue after nightfall

- Atmosphere - create a comfortable or dramatic step effect

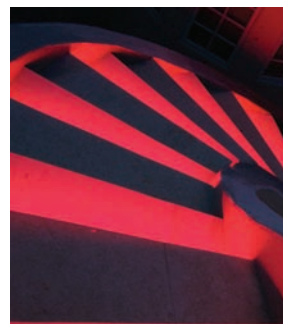

# LED INDOOR THEATER LIGHTING



## LEDLINE LSL201

### SPECIFICATIONS

#### ILLUMINATED STEP - INDIVIDUAL COMPONENT LIST:

##### DESCRIPTION UNIT

- IL-8010103/c13 (BLACK) /c12 (SILVER) 78" - Light alloy profile black or silver anodized, pre-drilled, with anti-slip surface and housing for fasteners to step.
- IL-M130109/c13 (BLACK) /c12 (GREY) 78" - Anti-slip profile in specially formulated polymer black or grey.
- IL-80204\*\* 78" - Electronic module with 1.5, 3, 4.5, OR 9 SMD LED's/ft. in (12/24V DC). Available in blue, white, green (B/W/G) or red, yellow (R/Y).
- IL-M130317 78" - Clear polycarbonate lens for riser (ADA compliant)
- IL-M130209 78" - Semi-rigid PVC cable cover.
- IL-M130212 (RIGHT) / 3 (LEFT) 1 U. - Injection molded end plate right / left.

#### ADDITIONAL NON MOUNTED MATERIAL AVAILABLE:

##### DESCRIPTION UNIT

- IL-80202\*\* 78" - Electronic module with 0.6, 1.2, or 2.4 LED's/ft. in (12/24V DC). Available in blue, white, green (B/W/G) or red, yellow (R/Y).
- IL-M240100 1 U. - Deep engraved number plate without illuminator set. Only up two digits or letters.
- IL-8020103 (12V) / 4 (24V) 1 U. - Miniature illuminator set for NUMBER PLATE with LED (12/24V DC). Available in blue, white, green (B/W/G) or red, yellow (R/Y).
- IL-8010401/c13 (BLACK) /c12 (SILVER) 78" - Advertising spacing black or silver anodized.
- IL-M130108 78" - Polymer insert for installation without carpet.

#### COMPLETE READY INSTALLATION-SYSTEM. READY-CUT SHIPMENTS UP TO A LENGTH OF 78 inches. WITH MINIATURE ILLUMINATOR-SET (longer lengths require evaluation):

- IL-70903\*\* - Light alloy profile black or silver anodized, pre-drilled, with anti-slip polymer black color and electronic module 1.5, 3, 4.5, or 9 SMD LED's/ft. (12/24V DC) in blue, white, green (B/W/G), red, yellow (R/Y) or warm white (WW). Available ADA compliant.

#### ADDITIONAL MOUNTED MATERIAL AVAILABLE:

- IL-80702\*\* - Mounted electronic module with 0.6, 1.2, or 2.4 LED's/ft. in (12/24V DC). Available in blue, white, green (B/W/G) or red, yellow (R/Y).
- IL-8040101 (12V) / 2 (24V) - Mounted deep engraved number plate with miniature illuminator set (12/24V DC) blue, white, green (B/W/G) or red, yellow (R/Y). Only up two digits or letters.
- IL-8010402/c13 (BLACK) /c12 (SILVER) - Mounted advertising spacing black or silver anodized.



# LED INDOOR THEATER LIGHTING



## LEDLINE LSL102

### SPECIFICATIONS

ILLUMINATED STEP - INDIVIDUAL COMPONENT LIST:

#### DESCRIPTION UNIT

- IL-8010102/c13 (BLACK) c/12 (SILVER) - Light alloy profile black or silveranodized, pre-drilled, with anti-slip surface and housing for fastening to step. 78"
- IL-8010202 - Black PVC profile, pre-drilled, with anti-slip surface and housing for fastening to step.
- IL-M130109/c13 (BLACK) 78" - Anti-slip profile in specially formulated polymer black .
- IL-80204\*\* 78" - Electronic module with 1.5, 3, 4.5, or 9 SMD LED's/ft. in (12/24V DC). Available in blue, white or green (B/W/G) or red, yellow (R/Y).
- IL-M130111 78" - Polymer support for electronic module.
- IL-M130316/c01 78" - Continuous diffusing clear lens manufactured in clear, fire retardant polycarbonate.
- IL-M130221 78" - Black PVC profile for riser (ADA compliant)
- IL-M130210 (RIGHT) / 1 (LEFT) 1 U. - Injection molded end plate right / left.

#### ADDITIONAL NON MOUNTED MATERIAL AVAILABLE:

##### DESCRIPTION UNIT

- IL-M2401\*\* 1 U. - Deep engraved number plate without illuminator set. Only up two digits or letters.
- IL-8020103 (12V) / 4 (24V) 1 U. - Miniature illuminator set for NUMBER PLATE with LED (12/24V DC). Available in blue, white, green (B/W/G) or red, yellow (R/Y).
- IL-M130108 78" - Polymer insert for installation without carpet.
- 

**COMPLETE READY INSTALLATION-SYSTEM. READY-CUT SHIPMENTS UP TO A LENGTH OF 78 inches. WITH MINIATURE ILLUMINATOR-SET (longer lengths require evaluation):**

- IL-70902\*\* - Light alloy profile black or silver anodized, pre-drilled, with anti-slip polymer black color and electronic module 1.5, 3, 4.5, or 9 SMD LED's/ft. (12/24V DC) in blue, white, green (B/W/G) or red, yellow (R/Y). Available ADA compliant.
- IL-70912\*\* - Black PVC profile, pre-drilled, with anti-slip polymer black color and electronic module 1.5, 3, 4.5, or 9 SMD LED's/ft. (12/24V DC) in blue, white, green (B/W/G) or red, yellow (R/Y). Available ADA compliant.

#### ADDITIONAL MOUNTED MATERIAL AVAILABLE:

- IL-8040101 (12V) / 2 (24V) - Mounted deep engraved number plate with miniature illuminator set (12/24V DC) blue, white, green (B/W/G) or red, yellow (R/Y). Only up two digits or letters.



# LED INDOOR THEATER LIGHTING



## LEDLINE LSL301 - FW FLOOR-WALL

### SPECIFICATIONS

ILLUMINATED PROFILE FOR AISLES - PARTS LIST:

### DESCRIPTION UNIT

- IL-8010109/c13 (BLACK) /c12 (SILVER) 78" - Light alloy base profile black or silver anodized with anti-slip surface.
- IL-M130022 78" - Light alloy profile with drill-hole to support base profile.
- IL-80204\*\* 78" - Electronic module with 1.5, 3, 4.5, OR 9 SMD - LED's/ft. in (12/24V DC). Available in blue, white, green (B/W/G), red, yellow (R/Y) or warm white (WW).
- IL-M130301/c01 78" - Continuous diffusing clear lens manufactured in pure, fire retardant polycarbonate.
- IL-M130110 78" - Cylindric profile in silicone for sealing.
- IL-M130106 78" - Elastomer profile for floor.
- IL-M130230/c13 2 U. - Injection molded end-plate



## LEDLINE LSL301 - FF FLOOR-FLOOR

### SPECIFICATIONS

ILLUMINATED PROFILE FOR AISLES - PARTS LIST:

### DESCRIPTION UNIT

- IL-8010109/c13 (BLACK) /c12 (SILVER) 78" - Light alloy base profile black or silver anodized with anti-slip surface.
- IL-M130022 78" - Light alloy profile with drill-hole to support base profile.
- IL-80204\*\* 78" - Electronic module with 1.5, 3, 4.5, or 9 SMD LED's/ft. in (12/24V DC). Available in blue, white, green (B/W/G), red, yellow (R/Y) or warm white (WW).
- IL-M130301/c01 78" - Continuous diffusing clear lens manufactured in pure, fire retardant polycarbonate.
- IL-M130106 78" - Elastomer profile for floor.
- IL-M130230/c13 2 U. - Injection molded end-plate.



